INNOVATIVE
TYRES & TUBES LTD

THOSE WHO CHOOSE TO...

ALWAYS NEED TO STAY IN CONTROL

- **TRUCK & BUS**

INNOVATIVE TYRES & TUBES LTD

TRUCK / BUS **TYRES**



ITR 222

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
6.50-14	Light Truck	8	182	705	10.5	840	795	60	425	60	425
6.50-15	Light Truck	8	175	725	11.5	875	835	62	425	62	425
6.50-15	Light Truck	10	175	725	11.5	970	920	73	500	73	500
7.00-15	Light Truck	10	205	760	11.5	1050	925	75	515	75	515
7.00-15	Light Truck	12	205	760	11.5	1175	1030	90	620	90	620
7.50-15	Light Truck	14	215	780	13	1450	1375	94	650	94	650
7.00-16	Light Truck	12	200	796	12.5	1215	1065	90	620	90	620
7.00-16	Light Truck	14	200	796	12.5	1315	1160	100	690	100	690
7.50-16	Light Truck	12	222	830	12.5	1405	1240	90	620	90	620
7.50-16	Light Truck	14	222	830	12.5	1500	1320	100	690	100	690
7.50-16	Light Truck	16	222	830	12.5	1580	1390	110	760	110	760
8.25-16	Light Truck	16	235	860	14	1845	1755	110	760	110	760
8.25-20	Truck/Bus	16	232	970	14	2300	2000	120	825	110	760
9.00-20	Truck/Bus	16	262	1035	14	2650	2360	115	795	105	725
10.00-20	Truck/Bus	16	280	1065	15.5	3000	2630	115	795	105	725
10.00-20	Truck/Bus	18	280	1065	15.5	3080	2700	120	825	110	760
11.00-20	Truck/Bus	16	300	1090	15	3000	2630	115	795	105	725
11.00-20	Truck/Bus	18	300	1090	15	3355	2945	120	825	110	760

ITR 999

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
10.00-20	Truck	18	285	1080	18.5	3080	2700	120	825	110	760

ITR 555

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
10.00-20	Truck	18	285	1080	18.0	3080	2700	120	825	110	760

INNOVATIVE
TYRES & TUBES LTD

SIGMA XXX

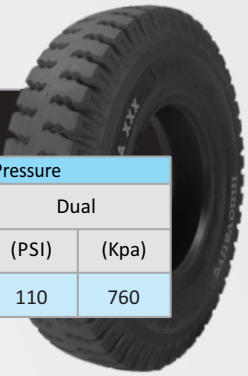

Tyre Size	Application	Ply Rating	Section Width mm	Overall Dia. mm	Non Skid Depth mm	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						Kgs.	Kgs.	(PSI)	(Kpa)	(PSI)	(Kpa)
10.00-20	Truck	18	285	1075	23.5	3080	2700	120	825	110	760

N 426

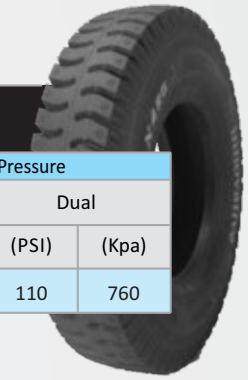

Tyre Size	Application	Ply Rating	Section Width mm	Overall Dia. mm	Non Skid Depth mm	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						Kgs.	Kgs.	(PSI)	(Kpa)	(PSI)	(Kpa)
10.00-20	Truck	18	280	1070	22	3080	2700	120	825	110	760

ITL 999

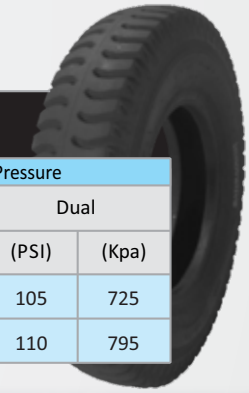

Tyre Size	Application	Ply Rating	Section Width mm	Overall Dia. mm	Non Skid Depth mm	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						Kgs.	Kgs.	(PSI)	(Kpa)	(PSI)	(Kpa)
12.00-24	Truck	18	315	1230	20	4250	3750	115	795	105	725
12.00-24	Truck	20	315	1230	20	4500	3875	125	860	110	795

INNOVATIVE TYRES & TUBES LTD

TRUCK / BUS **TYRES**

ITL 444

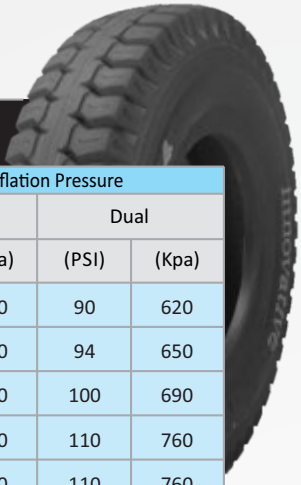

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.00-15	Light Truck	12	205	770	17	1175	1030	90	620	90	620
7.50-15	Light Truck	14	220	800	15	1450	1375	94	650	94	650
7.00-16	Light Truck	14	205	807	18	1315	1160	100	690	100	690
7.50-16	Light Truck	16	220	835	17.4	1580	1390	110	760	110	760
8.25-16	Light Truck	16	230	835	17.6	1850	1750	110	760	110	760
8.25-16	Light Truck	18	230	855	17.6	1900	1800	115	795	115	795
10.00-20	Truck/Bus	16	280	1065	21.5	3000	2630	115	795	105	725
10.00-20	Truck/Bus	18	280	1065	21.5	3080	2700	120	825	110	760
11.00-20	Truck/Bus	16	292	1110	21.5	3265	2865	115	795	105	725
11.00-20	Truck/Bus	18	292	1110	21.5	3355	2945	120	825	110	760
12.00-20	Truck/Bus	18	314	1140	21.5	3725	3265	115	795	105	725

ITL SPRINTER

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.00-15	Truck	12	200	770	16	1175	1030	90	620	90	620
7.50-15	Truck	14	218	805	15.5	1450	1375	94	650	94	650
7.00-16	Truck	12	205	800	16.5	1215	1065	90	620	90	620
7.50-16	Truck	16	215	835	17.5	1600	1400	110	760	110	760
8.25-16	Truck	16	230	860	17.5	1850	1750	110	760	110	760
8.25-20	Truck	16	232	970	19.5	2300	2000	120	825	110	760
9.00-20	Truck	16	262	1055	20.5	2650	2325	115	795	105	725
10.00-20	Truck	16	280	1075	24.5	3000	2630	115	795	105	725
10.00-20	Truck	18	280	1075	24.5	3080	2700	120	825	110	760
10.00-20	Truck	18	280	1070	22	3080	2700	120	825	110	760
10.00-20	Truck	18	280	1070	22	3080	2700	120	825	110	760
10.00-20	Truck	18	280	1070	22	3080	2700	120	825	110	760
10.00-20	Truck	18	280	1070	22	3080	2700	120	825	110	760
10.00-20	Truck	18	280	1070	22	3080	2700	120	825	110	760

INNOVATIVE
TYRES & TUBES LTD

ITS 888

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-16	Light Truck	12	220	835	16	1405	1240	90	620	90	620
7.50-16	Light Truck	14	220	835	16	1495	1315	110	760	110	760
7.50-16	Light Truck	16	220	835	16	1580	1390	110	760	110	760
12.00-24	Truck	18	315	1235	20	4250	3750	115	795	105	725
12.00-24	Truck	20	315	1235	20	4500	3875	125	860	115	795



ITS 777

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-16	Light Truck	14	213	827	17.0	1495	1315	100	825	110	760
7.50-16	Light Truck	16	213	827	17.0	1850	1390	115	795	105	725
10.00-20	Truck	16	278	1078	19.5	3000	2630	115	795	105	725
10.00-20	Truck	18	278	1078	19.5	3080	2700	120	825	110	760

INNOVATIVE TYRES & TUBES LTD

TRUCK / BUS **TYRES**



RIBLUG 088

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						Kgs.	Kgs.	(PSI)	(Kpa)	(PSI)	(Kpa)
9.00-20	Truck	16	274	1050	21	2650	2360	115	795	105	725

S78

Tyre Size	Application	Ply Rating	Section Width mm	Overall Dia. mm	Non Skid Depth mm	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						Kgs.	Kgs.	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-16	Light Truck	14	218	835	12.5	1495	1315	110	760	110	760
7.50-16	Light Truck	16	218	835	12.5	1580	1390	110	760	110	760

ITR 111

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						Kgs.	Kgs.	(PSI)	(Kpa)	(PSI)	(Kpa)
10.00-20	Trailer	14	275	1049	10.0	2800	2430	90	620	100	690
11-22.5	Trailer	14	275	1049	10.0	2800	2430	90	620	100	690

ITR 112

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						Kgs.	Kgs.	(PSI)	(Kpa)	(PSI)	(Kpa)
7.00-15	Trailer	10	200	755	7.5	2400	1820	70	482	70	482

ITR 111

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						Kgs.	Kgs.	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-17	Trailer	10	235	870	11	----	----	–	—	--	—

INNOVATIVE TYRES & TUBES LIMITED
1201-03, G.I.D.C., Halol-389 350,
Panchmahal, Gujarat, INDIA
Ph. : +91-2676-220621,
Email : sales@innovativetyres.co.in

www.innovativetyres.com